

TCR-ML-12-1/2K

HAFNER

Spojka so zárezným prstencom Koleno




productDataPdf.propertiesHeader

Prípoj	R 1/2"
Pracovné médium	Stlačený vzduch, voda, olej
Teplotný rozsah	-20°C...+80°C
Materiál tela	Poniklovaná mosadz
Priemer hadice	Ø12
Pracovný tlak	0...50 bar

TCR-ML-12-1/2K

HAFNER

Spojka so zárezným prstencom Koleno

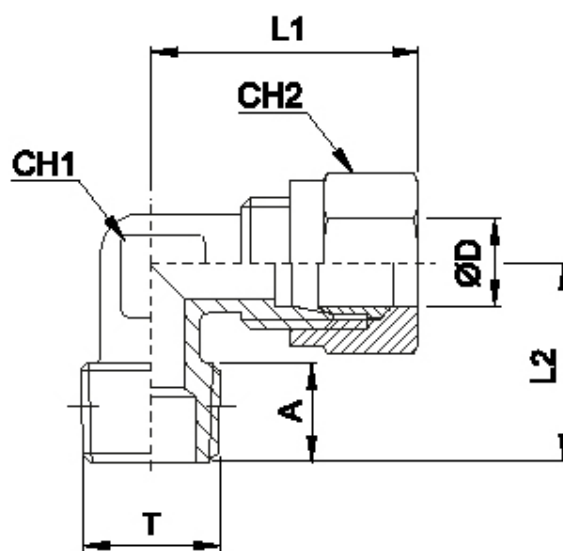

Typnummer	ØD	T	A	L1	L2	CH1	CH2
TCR-ML-4-1/8K	4	R 1/8"	8	21	16	9	10
TCR-ML-6-1/8K	6	R 1/8"	8	22	16	9	12
TCR-ML-6-1/4K	6	R 1/4"	11	24,5	20	11	12
TCR-ML-8-1/8K	8	R 1/8"	8	24	17	11	14
TCR-ML-8-1/4K	8	R 1/4"	11	24	20	11	14
TCR-ML-10-1/4K	10	R 1/4"	11	32	23,5	13	19
TCR-ML-10-3/8K	10	R 3/8"	11,5	32	24	13	19
TCR-ML-10-1/2K	10	R 1/2"	14	34	28,5	15	19
TCR-ML-12-3/8K	12	R 3/8"	11,5	34,5	25,5	15	22
TCR-ML-12-1/2K	12	R 1/2"	14	34,5	28,5	15	22
TCR-ML-14-1/2K	14	R 1/2"	14	38	30	17	27
TCR-ML-16-1/2K	16	R 1/2"	14	39,5	31,5	19	30
TCR-ML-18-1/2K	18	R 1/2"	14	44	34	22	32